



Easygates Distribution Price List 2012/13

Unit 16 James Scott Road, Halesowen, West Midlands. B63 2QT

Suppliers of:

Gate Automation
Access Control
Intercom Systems
Safety Edge Systems
Cantilever Equipment



INDEX

Page	
3	Gate Automation
4	Radio Transmitters
5	Radio Receivers / Controllers
6	Access Control / Loops / Beams
7	Access Control
8 - 10	ASO Safety Edge Systems
11	HI Motions Cantilever Kits

Company Profile


Having been established for over 10 years now Easygates Ltd has worked hard to gain a reputation as one of the leading gate automation, gate safety & access control suppliers in the UK Industry. With a highly skilled workforce of over 20 employees and ideally situated in the Midlands, we provide a nationwide delivery service backed up by excellent customer service and FREE telephone support.



Swing Gate Automation

Nice Metro Kit - 24V / 230V

- 2 x Motors
- 2 x Boxes
- 2 x ON2 Remotes
- 1 x MC824H / A60 Control Panel
- 1 x MOFB Bluebus / BF Photocells
- 1 x OXI Receiver

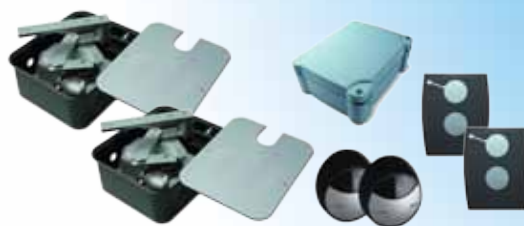


Nice Big Metro Kit - 24V

- 2 x Motors
- 2 x Boxes
- 2 x ON2 Remotes
- 1 x MC824H
- 1 x MOFB Bluebus
- 1 x OXI Receiver




Nice Toona Kit - 24V (3m, 5m, 7m leaf Kit)

- 2 x Motors
- 2 x PLA13 Stops
- 2 x ON2 Remotes
- 1 x MC824H Control Panel
- 1 x MOFB Bluebus Photocells
- 1 x OXI Receiver

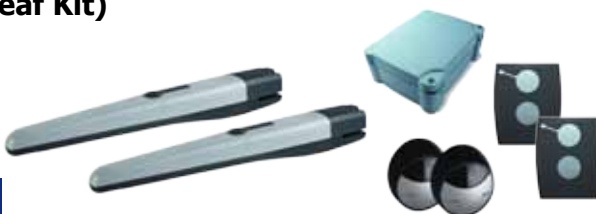

Nice Toona Kit - 230V (3m, 5m leaf Kit)

- 2 x Motors
- 2 x PLA13 Stops
- 2 x ON2 Remotes
- 1 x A60 Control panel
- 1 x BF Photocells
- 1 x OXI Receiver

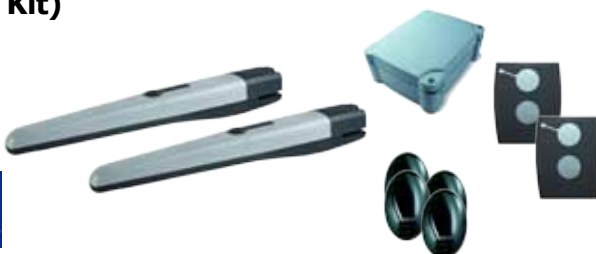

Nice Hyppo Kit - 230V

- 2 x Motors
- 2 x ON2 Remotes
- 1 x A60 Control panel
- 1 x BF Photocells
- 1 x OXI Receiver



Additional ON2
Remote:



Additional MOFB
Photocells:



Additional BF
Photocells:

Nice Robus 600 / 1000 - 24V

- 1 x Motor
- 2 x ON2 Remotes
- 1 x RBA3 Control panel
- 1 x MOFB Bluebus Photocells
- 1 x OXI Receiver



Nice RUN 1500 - 24V

- 1 x Motor
- 2 x ON2 Remotes
- 1 x RBA3 Control panel
- 1 x MOFB Bluebus Photocells
- 1 x OXI Receiver



Nice RUN 2500 / 2500I- 230V

- 1 x Motor
- 2 x ON2 Remotes
- 1 x RBA3 Control panel
- 1 x MOFB Bluebus Photocells
- 1 x OXI Receiver



Nice TUB 3500 - 400V

- 1 x Motor
- 1 x A500 Control panel



Tooth Rack

M4 1m PVC Rack



30mm x 8mm x 1000mm

M4 1m Heavy Duty Steel Rack



30mm x 8mm x 1000mm

M6 1m Heavy Duty Steel Rack



30mm x 30mm x 1000mm

NICE Automation Accessories



Nice OVIEW Programming tool

- Portable programming tool for NICE 24V Panels
- Extra programming features
- Event Logging memory
- Carry out fault finding and setup changes instantly!
- Built in 24Hr Timer
- Fully Backlit Large LCD Display



Nice OVBT / OVBTGSM

- Remote PC programming tool for NICE 24V Panels
- Enables complete setup of system through software
- Fits Directly on the reverse of OVIEW tool (purchased separately)
- Bluetooth or Bluetooth & GPRS options available
- Remotely monitor system via internet (GPRS only)



Nice FT210B - Battery Bluebus Photocells

- 210° Adjustable Lens Horizontally
- 30° Adjustable Lense Vertically
- 8.2KOhm Resistive Edge Input
- Battey Powered
- 46mm x 128mm x 45mm



Nice MOTXR / MOTB

- MOTXR - Wireless Keypad compatible with FLoRS series of receivers
- MOTB - Bluebus compatible



Nice Solemyo Solar kit

- Photovailtic solar panel for 24V Power Supply
- 24V Battery box with control circuit and carry handle
- Mains Adapter Supplied for manual charging





Purchase 50+ remotes for FREE etching service with your company details!

Manufacturer		Model	Frequency	Price	Price (50+)
Prastel		MPSTP2E	433.92 Mhz		
Prastel		TC2E	433.92 Mhz		
Prastel		TC4E	433.92 Mhz		
Prastel		TC4S	868 Mhz		
CAME		TOP432S	433 Mhz		
CAME		TOP432NA	433 Mhz		
Cloner		CL4000	433 Mhz		
NICE		ON2	433 Mhz		
NICE		FLO2	433 Mhz		
NICE		FLO2RS	433 Mhz		
BFT		MITTO2	433 Mhz		
Liftmaster		94335E	433 Mhz		
Liftmaster		4335E	433 Mhz		
Ditec		GOL4	433 Mhz		
Ditec		GOL4C	433 Mhz		
GiBiDi		Domino	433 Mhz		
FAAC		XT2	868 Mhz		
FAAC		TM2-TM868DS	868 Mhz		
Amigo Genius		JA332	868 Mhz		

Radio Receivers / Controllers

MR1E / MR2E

- 1 x Relay (MR1E), 2 x Relays (MR2E)
- 433.92Mhz
- 0.5 amp relay
- 12/24V AC/DC
- Monostable / Bistable output
- MR1E - 200 Users / MR2E - 1000 users



MR4E-XP (433Mhz)/ MR4S-XP (868Mhz) Receiver

- 4 x Relays
- 433.92Mhz (MR4E-XP), 868Mhz (MR4S-XP)
- 0.5 amp relays
- 12/24V AC/DC
- Monostable / Bistable output
- 1000 users



M1000E / M2000E - Access Control Controller

- 12V/24V AC/DC
- 1 x Relay (M1000E) / 2 x Relays (M2000E)
- Built in Radio Receiver
- 9V Output for proximity reader
- 1000 users (M1000E), 2000 users (M2000E)
- REX input & Enable input for ground loops
- Wiegand 26,30,34 bit Compatible



MT4000-2 / MT10000-4 - Access Control Controller

- 2 Door Controller (MT4000-2) / 4 Door Controller (MT10000-4)
- 4000 Users (MT4000-2) / 10000 Users (MT10000-4)
- 2000 Memory event life (MT4000-2) / 16000 memory event life (MT10000-4)
- IP54 Enclosure
- AMIGO PC Software Package Included



MPROXMINI - Proximity Reader

- 9-12V DC
- 125KHz EM & TEMIC Compatible
- Range 30mm - 60mm
- Connection distance to the host - 100m
- 26bit HID Compatible



Box of 50 Proximity Tags



Clamshell proximity card
125Khz EM compatible
(100 units)



Proximity chip insert for
TC4E/TC4S transmitters
125Khz EM compatible

EASYBKA (Standalone)/ EASYBKW (Wiegand) Keypad

- 500 Users (EASYBKA Only)
- IP65 Rated
- 2 Relays (EASYBKA Only)
- Integrated Keypad Heater
- Blue Illuminated Keypad



ULD4669/13F - Single Channel 12-24V Loop Detector & 230V Loop Detector

- 1 Relay output
- 12/24V & 230V Versions
- Sensitivity adjustable
- Relay base included




CISA Elettrika Lock

- Electric Hold Open Function
- Backset can be regulated from 50mm to 80mm
- 12V AC
- Holding Force of 2000KG
- Strong Steel Exterior Casing
- Rotary Hook Deadbolt
- Failsecure



DIAX ES500 Maglock

- 12V / 24V input
- 500KG holding force
- 202 x 60 x 40mm
- IP67

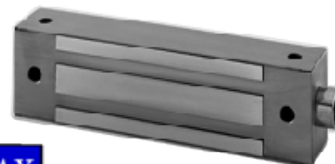

FT25B Battery Photocells

- 12/24V AC/DC
- TX Battery operated
- N/O - N/C output
- 15m range



FSTYLE25A Vandal Resistant cells

- 3 Fixing Angles
- IP65 Rated
- NC output
- Stainless Steel Housing



FOTO30SDE Relay Photocells

- 12/24V AC/DC
- Auto Aligning
- Nominal Range 25m



FIRE-F180

- 12/24V AC/DC
- N/O - N/C output
- 180 degree Adjustable
- (Anti Vandal Available)



FOTO35SDE Flush Photocells

- Range 30m
- IP55
- 12-24V AC/DC



BATSLIM

- 1 Battery - 3.6V Lithium Thionyl Chloride for FSTYLE25B



Preformed Loop Cable -
WIRE1 (2m x 1m)
WIRE2 (3m x 2m)
(15m trailing cable)



DIN Rail Relay Module - (switches
up to 250V from 6V - 24V input)
NO & NC output



DIN Rail Transformer:
15-12 (12V)
15-24 (24V)

Access Control

ELDES ESIM110 - GSM Relay

- Programmable by USB / GPRS / SMS
- GSM module frequency: 850/900/1800/1900 MHz
- Supply voltage: 10-24V AC/DC
- Inputs: 3
- Relay Output: 1
- Output type: NO (relay)

eldes



VIDEX GSM Intercom System

- Large multiway systems available
- Dials any land line or mobile number
- Divert a call to up to five default phone numbers
- Dry contact relay output
- Auxillary output (open collector)
- Push to exit and auxillary inputs



Daitem Wireless Audio Intercom System

- Up to 150m Range
- Dect style handset
- Electric lock / clean contact output
- Built in proxy reader
- Up to 4 call stations
- Up to 4 handsets per controller



ACI Farfisa Audio Intercom 1PEXFD

- 2 Wire System
- Integrated Backlit Keypad (2 x relays)
- Up to 200m
- Rain Shelter Included
- Clean Contact output / 12V output



ACI Farfisa Colour Intercom System

- 4+1 Wire System
- Integrated Backlit Keypad (2 x relays)
- Up to 200m
- Rain Shelter Included
- Clean Contact output / 12V output



Additional ECHOS
Handset



Additional Audio
Handset



H3D-M Multi-function
Timed Relay



24 Hr 7 Day Relay Timer:
TH827-12 (12V)
TH827-24(24V)

KMG-2000-G


KMG-2000-G measures the dynamic and static forces during the specified time and displays the force vs. time graph as well as the peak force value. All measurement values are instantly evaluated and saved to the internal memory which can hold up to 500 measurements at any one time.



- Stand-alone one-hand instrument (Supplied with protocol and analysis software)
- BS EN12445 Compliant Device
- Easy handling
- LCD-Display
- Graphical display of measurement values and limits
- Mechanical overload protection
- Battery powered (approx. 100 hrs of operation without charging)
- Internal memory for 500 measurements (175 sets of measurements)
- USB interface for data transfer
- Extension arm kits available

Transfer all data to PC with the protocol and analysis software

- Graphical display of force / time diagram
- Analysis of the diagrams
- Filing and documentation of measurements
- Printing of test protocols
- Online diagram displayed after measurements

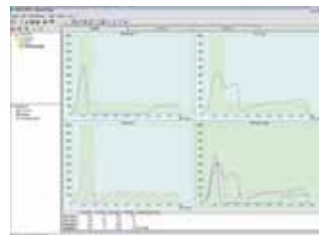

KMG-Lite

KMG-Lite was specifically designed for quick and easy on site force testing on all kinds of automated doors and gates. After activation, the device is instantly ready for measurement. As soon as a 20N trigger force is detected, KMG-Lite automatically starts its measurement and evaluation. After five seconds measurement time, it displays the values of the dynamic maximum force, the dynamic time duration and the static end force. Limiting values for these parameters are specified within EN12453.



Training Opportunities

As part of our on-going development and relationship with supplier ASO Safety Solutions, Easygates Ltd has recently opened a new training facility housed within our offices in the West Midlands. The facility is equipped with full size automated gates demonstrating all of our safety equipment range and is suitable for groups of up to 20 delegates. Half or full day courses are now available to manufacturers, installation and maintenance company's covering the following disciplines:-

- Understanding Machinery Directive (2006/42/EC)
- Understanding and implementing BS EN13241-1 product standard for gates & doors
- Specifying Installing & maintaining ASO Safety edges & control equipment



Easygates Ltd Training Centre

Laser Etching Services

Personalised Products!

In addition to the many products we supply, we have recently undertaken a laser etching service which allows us to incorporate your details onto almost any product. For instance, remote keyfobs with your company logo and contact details etched into the casing, which will encourage future sales to be directed through yourselves.

This service is also applicable in the gate automation commissioning stage, where we can customise CE marked plates to then be applied the the installtion.

We offer our etching service at highly competitive rates and in large quantity orders, we even offer it FREE!

- CE Marked Plates
- Photocells
- Junction Boxes
- Remote Keyfobs
- Keypads
- Push buttons & much more!



Premade Safety Edges

Easygates produce all safety edges in-house to custom lengths as required by the installer/manufacturer on a 2-3 working day lead-time from order. Each edge is assembled and supplied with aluminium backing ready for shipping in protective packaging.


Description (PRE-ASSEMBLED PRICES)		
GE365 CK - 65mm Profile (T-foot)		
GE365 - 1.5m	GE 365 CK safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GE365 - 2.0m	GE 365 CK safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
GE365 - 2.5m	GE 365 CK safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GE245 CK - 45mm Profile (T-foot)		
GE245 - 1.5m	GE 245 CK safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GE245 - 2.0m	GE 245 CK safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
GE245 - 2.5m	GE 245 CK safety edge up to 2.5M assembled, includes aluminium, end caps, cables	
GE225 CK - 25mm Profile (T-foot)		
GE225 - 1.5m	GE 225 CK safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GE225 - 2.0m	GE 225 CK safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
GE225 - 2.5m	GE 225 CK safety edge up to 2.5M assembled, includes aluminium, end caps, cables	
GEF65 SK - 65mm Profile (Clip-foot)		
GEF65 - 1.5m	GE-F65 safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GEF65 - 2.0m	GE-F65 safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
GEF65 - 2.5m	GE-F65 safety edge up to 2.5M assembled, includes aluminium, end caps, cables	
GEF45 SK - 45mm Profile (Clip-foot)		
GEF45 - 1.5m	GE-F45 safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
GEF45 - 2.0m	GE-F45 safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
GEF45 - 2.5m	GE-F45 safety edge up to 2.5M assembled, includes aluminium, end caps, cables	
SKL15-10 - 15mm Profile (T-foot)		
SKL15-10 - 1.5m	SKL15-10 safety edge up to 1.5M assembled, includes aluminium, end caps, cables	
SKL15-10 - 2.0m	SKL15-10 safety edge up to 2.0M assembled, includes aluminium, end caps, cables	
SKL15-10 - 2.5m	SKL15-10 safety edge up to 2.5M assembled, includes aluminium, end caps, cables	



More Profiles Available!

ASO GE225 TK 25mm Safety Edge Profile

- 25mm Profile
- 25m roll
- Fits AL25-14 Aluminium Profile (exposed)
- Uses KS6 Leads and KS6 Resistors (See below for prices)



ASO GE245 TK 45mm Safety Edge Profile

- 45mm Profile
- 25m roll
- Fits AL25-14 Aluminium Profile (exposed)
- Uses KS6 Leads and KS6 Resistors (See below for prices)



ASO GE365 CK 65mm Safety Edge Profile

- 65mm Profile
- 25m roll
- Fits AL35-14 Aluminium Profile (exposed)
- Uses KS6 Leads and KS6 Resistors (See below for prices)



ASO SKL15-10 TK 15mm Safety Edge Profile

- 15mm profile
- 25m roll
- Fits AL15-9 Aluminium
- Uses KS2 Leads and KS2 Resistors (See below for prices)



ASO SKL8-8 8mm Safety Edge Profile

- 8mm profile
- 50m roll
- Self adhesive material
- Uses KS1 Leads and KS1 Resistors (See below for prices)



KS6 Plugs




KS6W (Resistor)
KS6L0.5 (0.5m lead)
KS6L2.5 (2.5m lead)
KS6L5.0 (5.0m lead)
KS6L10.0 (10.0m lead)

KS2 Plugs



KS2W (Resistor)
KS2L0.5 (0.5m lead)
KS2L2.5 (2.5m lead)
KS2L5.0 (5.0m lead)
KS2L10.0 (10.0m lead)

KS1 Plugs

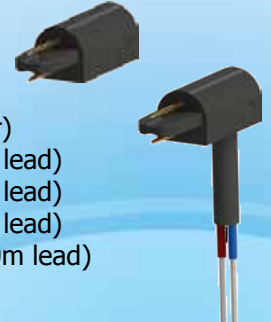

KS1W (Resistor)
KS1L0.5 (0.5m lead)
KS1L2.5 (2.5m lead)
KS1L5.0 (5.0m lead)
KS1L10.0 (10.0m lead)

ASO Safety Edge Systems



ASO Profile Cutting Tool

- ASO Rubber profile cutting tool



ASO Glue Set

- 1 x 20g Glue
- 1 x 10ml Contact Primer
- 1 x 10ml Contact Primer



ASO Plug Insert Tool

- Insertion tool for KS6 Plugs



ASO SK32-24 CAT3 Swing Gate Controller

- CAT3 2 Channel Controller
- 24V AC/DC
- 8.2Kohm monitoring



INDUS Inductive Transmission System

- For Sliding Gates
- CAT3 Inductive Transmission Kit
- 24V AC/DC
- 2 x Stationary Edge Inputs
- 2 x Moving Edge Inputs



INDUS Spare parts



SPK55 - Stationary Coil



SPK54 - Gate Mounted Coil



ISK71-24

ASO GEF45 SK 45mm Safety Edge Profile

- 45mm Profile
- 25m roll
- Fits AL30-10 Aluminium Profile (hidden)



ASO GEF65 SK 65mm Safety Edge Profile

- 65mm Profile
- 25m roll
- Fits 30-10 Aluminium Profile (hidden)



ASO GEF85 SK 85mm Safety Edge Profile

- 85mm Profile
- 25m roll
- Fits 30-10 Aluminium Profile (hidden)



ASO GEF115 SK 115mm Safety Edge Profile

- 115mm Profile
- 12.5m roll
- Fits 40-10 Aluminium Profile (hidden)



ASO AL 15-9 Aluminium Profile

(fits SKL15-10 profile)



ASO AL 25-14 Aluminium Profile

(fits GE225 & GE245 profiles)



ASO AL 35-14 Aluminium Profile

(fits GE365 profile)



ASO AL 30-10 Aluminium Profile

(fits GEF45, GEF65 & GEF85 profiles)



ASO AL 40-10 Aluminium Profile

(fits GEF115 profile)



ASO Plug'N'Sense Assembly Systems



Simple 'Plug n Sense' End Caps



ASO KS8 - 45mm Caps

- Fits GEF45 SK Rubber profile



KS8W (Resistor) - 45
KS8L0.5 - 45 (0.5m Lead)
KS8L2.5 - 45 (2.5m Lead)
KS8L5.0 - 45 (5.0m Lead)
KS8L10.0 - 45 (10.0m Lead)

ASO KS8 - 65mm Caps

- Fits GEF65 SK Rubber profile



KS8W - 65 (Resistor)
KS8L0.5 - 65 (0.5m Lead)
KS8L2.5 - 65 (2.5m Lead)
KS8L5.0 - 65 (5.0m Lead)
KS8L10.0 - 65 (10.0m Lead)

ASO KS8 - 85mm Caps

- Fits GEF85 SK Rubber profile



KS8W - 85 (Resistor)
KS8L0.5 - 85 (0.5m Lead)
KS8L2.5 - 85 (2.5m Lead)
KS8L5.0 - 85 (5.0m Lead)
KS8L10.0 - 85 (10.0m Lead)

ASO KS8 - 115mm Caps

- Fits GEF115 SK Rubber profile



KS8W - 115 (Resistor)
KS8L0.5 - 115 (0.5m Lead)
KS8L2.5 - 115 (2.5m Lead)
KS8L5.0 - 115 (5.0m Lead)
KS8L10.0 - 115 (10.0m Lead)

HI Motions Small Cantilever Kit (350KG Max)

- 2 x mini 5 wheel carriages
- 1 x meeting point
- 1 x support wheel
- 6m running track (1 x 6m length)



HI Motions Medium Cantilever Kit (700KG Max)

- 2 x medium 8 wheel carriages
- 1 x meeting point
- 1 x support wheel
- 9m running track (3 x 3m lengths)



HI Motions Large Cantilever Kit (1200KG Max)

- 2 x large 8 wheel carriages
- 1 x meeting point
- 1 x support wheel
- 9m running track (3 x 3m lengths)



301.M Small 5 Wheel Carriage



301.8L Medium 8 Wheel Carriage



301.8XL Large 8 Wheel Carriage




321.6 Small 6.0m Track (Galv)



328.3 Medium 3.0m Track (Galv)



333.3 Large 3.0m Track (Galv)



Visit www.EGDUK.com to download all of our recent guides to gate safety and legislation...

